

Apparel Online

BANGLADESH

September 2016 | Pages 76 | [Everything Sourcing](#) | www.apparelresources.com

14

Expats worried; buyers fret over safety concerns!

24

Design & PD, the way forward for VIYELLATEX

30

Odyssey Craft (Pvt.) Ltd.: A green facility with a difference!

54

Heat Insulation: A green solution for saving energy



Employee Engagement as HR practices gain popularity

2261 HER

FEED OF THE ARM UNIT




VIBEMAC BELT PULLER

4999 RPM

NEW PNEUMATIC TRIMMING DEVICE

SENSOR FOR DYNAMIC PRESSURE PRESSER FOOT CONTROL

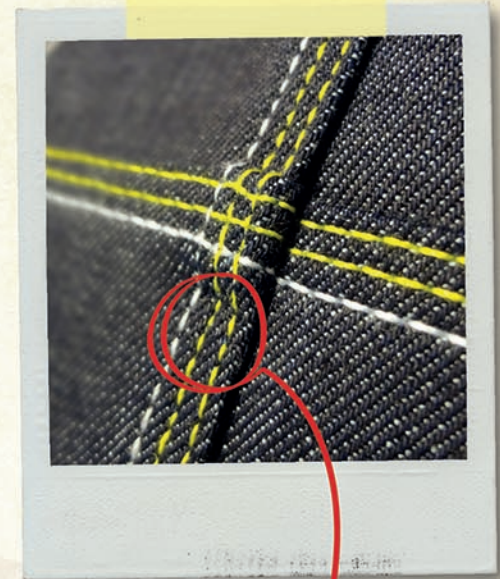

SPECIFICATIONS

- ✓ Max Sewing Speed: 4999 rpm
- ✓ Stitching Length: from 0,9 to 4,5 mm
- ✓ Standard Needle Gauge: 1/4" (6,4 mm)
- ✓ Optional Needle Gauge: 9/32" (7,2 mm)
3/8" (9,6 mm) - 1/4" + 1/8" (MIX 9,6 mm)
3/16" (4,8 mm) 2 needles - 5/16" (7,9 mm)
- ✓ Sewing Head: Vi.Be.Mac. 3 needle chain stitch

5 INSEAM PER MINUTE
PRODUCTION RATE INCOMPARABLE IN THE MARKET!

CONSTANT STITCHING LENGTH
THANKS TO THE PULLER AND THE PATENTED DCP SYSTEM



DISTRIBUTES



FOLLOW US!!



For info, write an email @ sales@vbm-grp.com
or contact vbm local branches @ the addresses: sales@vbm-in.com (INDIA) | sales@vbm-bd.com (BANGLADESH)
sales@vbm-ae.com (U.A.E.) | sales@vbm-eg.com (EGYPT) | sales@vbm-mx.com (MEXICO)

VI.BE.MAC. Spa: Via Monte Pastello 7/1, 37057 S. Giovanni Lupatoto (VR) Italy - ph. +39 045 8778151/52 - www.vibemac.com